

Diesel Screw Compressor Controller MAM600B2 (Pressure converter)

USER MANUAL

Shenzhen Plot Electronic Co., Ltd

Address: 4-5F,5 Bldg,Highstar Industry Park,Gangtou Community,
Bantian,Longgang District,Shenzhen City, China

Telephone: (+86 0755) 83173599 / 83172822 Postal code: 518129

Fax: (+86 0755) 83172966

E-mail: plt@pltsz.com

Web site: www.pltsz.com

Content

1,Product Overview.....	3
2,Product Feature.....	3
3,Main Technical Parameter	3
4,Button Explanation	4
5, Parameter view and set.....	5
6,Mechanical、Electrical Installation	9
7,Control principle	12
8,Troubleshooting	13
9,Electronic Diagram	14

1,Product Overview

MAM-600B2 diesel air compressor controller is automatical air compressor monitoring system controlled by high-performance single chip micro computer.MAM-600B2 adopts the newest MCU and combine with most advanced control technology, it can accurately detect and display the speed, oil pressure, air temperature, water temperature, diesel level, discharge air temperature and so on. Also, based on user data set,MAM-600B2 can be used to monitor the above data and send corresponding control signal which can transfer to alarm signal and give user hint.

2,Product Feature

- Advanced micro computer control with high reliability
- Real time detection and display of diesel compressor data
- Adopt advanced control technology, enable compressor work stable and reliable .
- Strong anti-interference ability
- Resistance for bad circumstance such as vibration, high and low temperature, humidity and salt mist
- Easy installation and operation
- Communication extension function

3,Main Technical Parameter

1. Work circumstance
 - ① Work temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$; Humidity: $\leq 98\%$; Vibration resistance $> 4g$ 。
 - ② Vibration: $2 \sim 25\text{Hz}$, Amplitude: 1.6mm ; $25 \sim 100\text{Hz}$, Acceleration: $\pm 40\text{m/S}^2$ 。
2. 2.Speed measurement
 - ① Measurement range: $0 \sim 9999\text{rpm/min}$ 。
 - ② Measurement error: $\leq \pm 1\text{rpm/min}$ (Speed measuring gear is above 60) .
 - ③ Highest signal frequency: 50KHz .
 - ④ Sensor: Reluctance speed sensor.
3. 3.Pressure Measurement
 - ① Measurement range:
Oil pressure: $0.00 \sim 1.00\text{MPa}$;
 - ② Measurement accuracy: 0.5
 - ③ Sensor: HUBA high temperature type ; $4 \sim 20\text{mA}$ pressure sensor.

4. 4.Discharge air temperature measurement
 - ① Measurement range: $-50^{\circ}\text{C} \sim +150^{\circ}\text{C}$ 。
 - ② Measurement accuracy: 0.5
 - ③ Sensor: Cu50 copper resistance sensor
5. Discharge air pressure detect: the stop signal is caused by the fluctuation of discharge air pressure.
6. Oil filter block, oil filter and generator check
7. Run time
Measurement range: 0~999999H。
8. Display
0.5 inch highlight digital display
9. 11. System power supply
DC24V $\pm$ 30%

4,Button Explanation

1、Display explanation:

- ①. Speed: Display the engine speed; Display the corresponding serial number after entering setting mode.
- ②. Oil pressure: Display the oil pressure; Display the corresponding parameter after entering setting mode.
- ③. Air temperature: Display the air temperature;
- ④. Water temperature: Display the water temperature. Display the time parameter after entering setting mode。
- ⑤. Barometer :display air pressure
- ⑥. Diesel level: display the percentage of diesel level

2、Indicator Explanation:

- ①. Charge indicator: Extinguish when the generator is running .
- ②. Preheat indicator: Indicate the preheat status of generator
- ③. Operation indicator: illuminated when the diesel compressor is running normally; Blink once after set and save data; Blink constantly when error occurred in saving or reading data, and will stop blink after user reset and save the data correctly
- ④. Alarm indicator: When speed , oil pressure, air temperature, water temperature

or diesel level alarm or fail, the corresponding display window will blink. For system prewarning, the alarm indicator will blink, For system failure, alarm indicator will be illuminated.

- ⑤. Pressure, water temperature alarm indicator: illuminated when air pressure contactor is closed and gives alarm signal; Illuminated when water contactor is closed and gives alarm signal.
- ⑥. Oil indicator: Indicate the oil absorption and filtration status.

3、 Button explanation:

- ①. Menu/confirm: Press this button to enter or exist para setting menu ,or save the data set.
- ②. Move button: In data viewing status, press this button to enter; In data setting status, press this button to move; After eliminating alarm, press this button to reset indicator light and indicator window.
- ③. Revise/timing: In data setting mode, press this button to revise the data; In data viewing status, press this button to move to the next menu; In normal working menu, press this button to display the running hour of compressor

4、 Key switch、 select switch、 start button switch:

- ①. Off position: Move key switch to this position to turn off controller power
- ②. On position: Move key switch to this position to turn on controller power.
- ③. Start button: After power on, press this button to turn on engine.
- ④. Preheat position: After power on, move key switch to this position to heat the diesel compressor.
- ⑤. Stop position: When diesel compressor is running, move select switch to this position to stop motor.

5、 Parameter view and set

The parameter has been set by manufactory and is not necessary to modify normally. User can modify the relatively parameter by three buttons “ MENU/SET ” , ” SWIFT ” , ” ALTER/TIMER”. In main menu, Press “MENU/SET” to enter password verification menu. The first data starts blinking, press “ ALTER/TIMER ” to alter the data from 0-9,also user can press “SWIFT” to move to the next data. User can confirm the password by pressing ” MENU/SET ” . The data will stop blinking if password is correct. User can press “ALTER/TIMER” to check the corresponding authority of password (Password is sorted to customer password and factory password. User can check and modify customer parameter by customer password and also user can check and modify customer and factory parameter by factory password) .The system will return to the main menu if password is not correct.

1.Parameter set

Input the correct password to switch to the parameter viewing menu. Modification and setting method is as followed.:

- ①. In parameter viewing status(data is not blinking),press “ALTER/TIMER” to check the corresponding authority of password .Press “SWIFT” the first data bit will blink. Press “ALTER/TIMER” to increase the blinking data. Press “SWIFT” to move the blinking data to he next data. Press “MENU/SET” to save the current data and return to the parameter viewing status(the blink stops and operation indicator blink once).

Example of parameter modification:

User can modify the SPEED ALARM parameter and PROTECTION DELAY TIME according to the following steps

- In main menu, press ”MENU/SET ”to enter password verification menu, the first data starts blinking
- Press “ ALTER/TIMER ”to modify the current blinking data which is also the first data of password. Press “SWIFT”, the second data starts blinking, Press “ALTER/TIMER” to modify the current blinking data which is also the second data of password. Modify the third and fourth password data with the same method. Press “MENU/SET” to confirm the password
- Enter parameter viewing status after the verification of the password Press “ALTER/TIMER” to enter to the menu P-06(Pic 5.1.1) (P-06: SPEED ALARM).Press “SWIFT” to enter modification and setting mode(digital display),The first data of SPEED COUNTER ALARM starts blinking, press “ALTER/TIMER” to modify the blinking data and press “SWIFT” to modify the next data with the same method.



PIC 5.1.1

- After the modification of SEEP ALARM and DELAY TIME PROTECTION, press “MENU/SET” to confirm (the data blink stops and operation indicator blink once).The system return to the parameter viewing status. User can refer to the above method to modify data.(For more parameter code, please refer to “parameter list and explanation”)

②.In parameter view status, press "ALTER/TIMER" to move to the next menu for more selection

③.In parameter view status, press "MENU/SET "to return to the main menu to finish parameter set

2.Parameter display, list and explanation

①.Parameter display

In parameter viewing status, controller display corresponding parameter serials No. In SPEED COUNTER column.



PIC 5.2.1

②.Parameter list and explanation

P-01: Password menu: Input customer password and factory password, user is allowed to check and modify the corresponding parameter. Original password:0000

P-02: Gear No.: Set the gear No. of speed measuring gear

P-03: Start speed counter: When speed counter is above this set data, engine is activated and starting circuit is disconnected.

P-04: Oil pressure speed counter: When speed counter is below this set data, ignore the oil pressure low signal.

P-05: Rated speed counter of diesel compressor

P-06: Speed counter alarm: When speed counter is above the set data, compressor will alarm
Respond time(S):how long to respond, when set as 9999,this function is invalid

P-07: Speed counter stop: When speed counter is above the set data, controller will stop the compressor

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-08: Oil pressure alarm: When oil pressure is below this set data, controller will alarm

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-09: Oil pressure stop: when oil pressure is below this set data, compressor will stop.

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-10: Water temperature alarm: when water temperature is above this set data, controller will alarm

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-11:Water temperature stop: when water temperature is above this set data, compressor will stop

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-12: Spare

P-13: Spare

P-14: Air temperature alarm: when discharge air temperature is above this set data, controller will alarm

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-15: Air temperature stop: when discharge air temperature is above this set data, compressor will stop

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-16: Oil level alarm: when the oil level is below this set data, controller will alarm

Respond time(S):how long to respond, when set as 9999,this function is

P-17: Oil level stop: When oil level is below this set data, compressor will stop

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-18: Ex factory date: set the ex factory date of compressor

P-19: Standby

P-20: Standby

P-21: Current run time

P-22: Max time limit(H):When the run time of compressor is above this set data, compressor cannot be activated; this function is invalid when set as 0000

P-23: Low air temperature limit: When the air temperature is below this set data, compressor will fail to stop

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-24: Low water temperature limit: When the water temperature is below this set data, compressor will fail stop

Respond time(S):how long to respond, when set as 9999,this function is invalid

P-25: Oil pressure sensor failure respond time.

Respond time(S):how long to respond, when set as 9999,this function is invalid. This protection is not restricted by speed counter.

P-26: When error occurred, and the data is set as 9999,D5 will be de-energized 12 will be energized until the system is power off; if the data is not set as 9999,D5 will be de-energized and after the delay time, it will energize again,D12 will be energized and after the delay time it will de-energize again.

For the motor(Cummins Engines) which will stop oil supply when de-energized ,the data is recommended to set to 9999;For the motor which will stop oil supply when energized, the data is recommended to set to 0005

P-27: Spare


6,Mechanical、 Electrical Installation

1,Mechanical、 Electrical Installation


- ①. Install the controller properly to a suitable position
- ②.Install the speed counter sensor to the shell of speed measuring gear. The gap between the sensor and the gear is 0.5~1mm, then tighten up the screw.
- ③.Install the discharge air temperature sensor, water temperature sensor ,oil pressure sensor, and speed counter sensor to the corresponding position and connect with the signal input terminal.
- ④. Connect correctly according to the terminal connection instruction.

2,Mechanical Installation Diagram

MAM-600B2 mechanical installation diagram is as below(PIC 6.2.1)

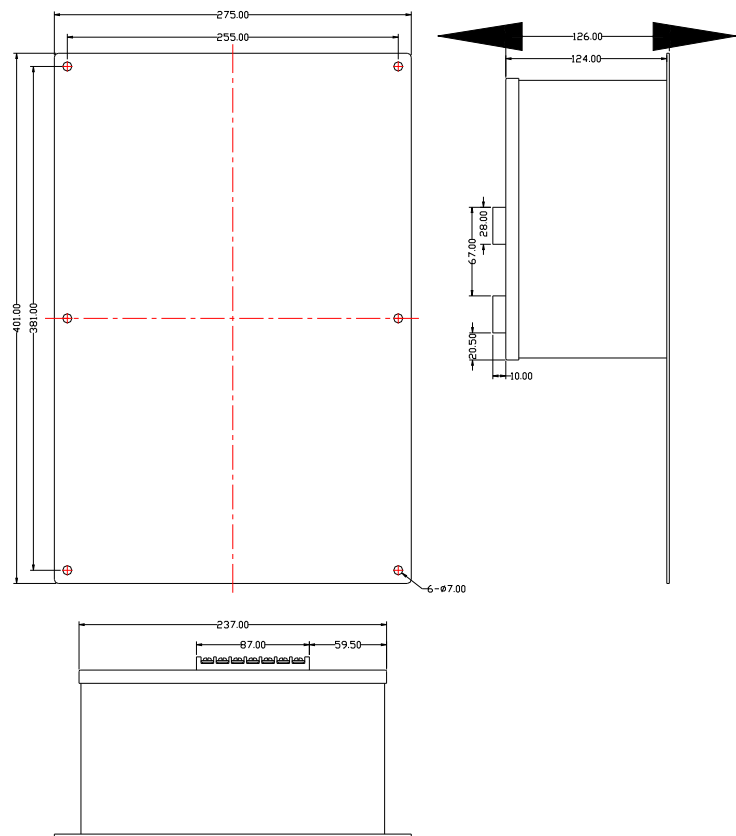


PIC 6.2.1 Product Dimension Diagram

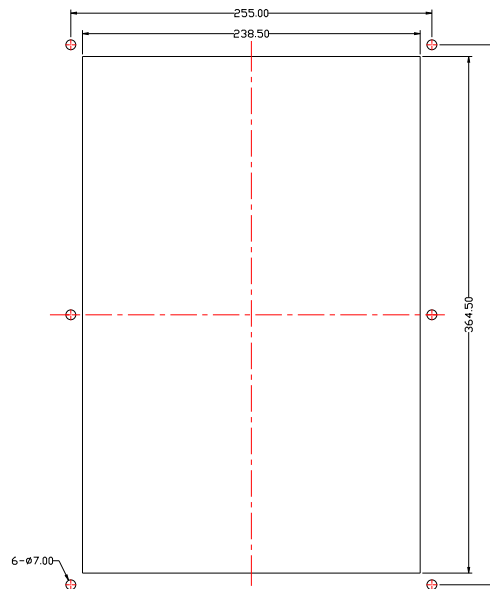

PIC6.2.2 Installation Dimension Diagram

3,Electrical Installation Diagram

MAM-600B2 electrical installation diagram is as below(PIC 6.3.1)

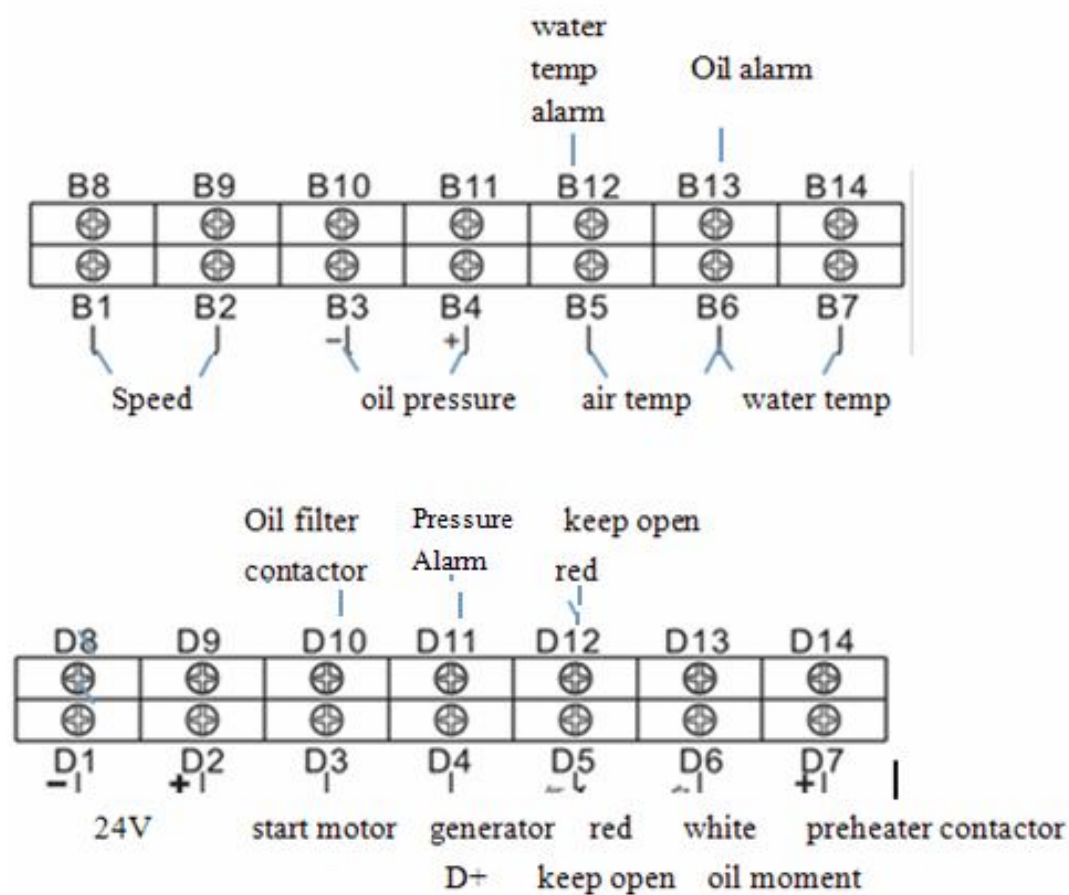

PIC 6.3.1

D5 is normally closed terminal for motor(stop oil supply when de-energized type)

D12 is normally open terminal for motor(stop oil supply when energized type)

7,Control principle

After install and turn on the controller, controller start normal work status and activate diesel. Execute load and unload operation by pressing load and unload control valve and control button. Based on the measurement data and user set data to send corresponding signal to measure and display the speed counter ,oil pressure, oil level, discharge air temperature and pressure of diesel compressor. Controller sends alarm signal and alarm contactor is closed when detects the data is over the user set data and stop data. Controller sends stop signal when detects the data over stop data. The operation process is as below.

1.Diesel engine preheat

When the air temperature is low or for initial start, adjust the select switch to the preheat, output terminal D7(output 24V) is energized and preheater starts working, turn the select switch to off, output terminal D7(output 24V) is de-energized and preheater stops working

2.Diesel compressor starts process

When switch the key to power on, controller output terminal D5 is energized(output 24V),D12 is de-energized. Press start button, controller output terminal D3,D6 are energized(output 24V),the start motor activates diesel engine, oil moment relay is closed to provide oil to engine. After start process, release the button and controller output terminal D3,D6 will be de-energized.

3.Diesel compressor operation process:

When the diesel engine is running and switch the pressure control valve to load ,the compressor inlet valve opens and compressor starts loading. When switch the pressure control valve to unload ,the compressor inlet valve closes and compressor starts unloading

4.Diesel normal stop:

In power on status, switch the select button to stop, controller output terminal D5 is de-energized and D12 is energized(output 24V), oil maintain relay opens and diesel engine stops running.(Output terminal D5 for engine of stop oil supply when de-energized type such as cummins;D12 for engine of stop oil supply when energized type such as Yuchai engine)

5, Air pressure alarm:

When the terminal D11 is connected with power negative electrode ,controller will alarm and stop, Error will not clear automatically after input terminal D11 and power negative is disconnected unless power off and restart.

6, Water temperature alarm

When the terminal D12 is connected with power negative electrode ,controller will alarm and stop, Error will not clear automatically after input terminal D12 and power negative is disconnected unless power off and restart.

7, Oil filter block alarm

When the terminal D10 is connected with power negative electrode ,controller will alarm with

the oil filter block indicator on, when D10 is disconnected with power negative electrode, controller will not alarm with the oil filter block-indicator off.

➤ **Note: Compressor needs to have all error clear and reset after failure stop**

8, Troubleshooting

Failure	Reason	Method
Discharge air temperature high	Poor heat dissipation, less oil	Check heat dissipation and lubricant quantity
Temperature sensor failure	Cable break, Cu50 copper resistance sensor failure	Check the cable and Cu50 copper resistance sensor
Pressure sensor failure	Sensor cable break, sensor failure, sensor cable reversed	Check the cable and pressure sensor

9,Electronic Diagram

